lamber®

DSP4EKDPS



This professional undercounter dishwasher is capable of delivering up to 600 dishes per hour with 3 operation cycles that enusre clean and sanitized dishes. The compact stainless steel design makes it ideal for commercial kitchens that require reliable and long-lasting perfomance during service hours.

FEATURES

- Top rotating rinse arm provides thorough water coverage for improved cleaning perfomance.
- Built-in drain pump enables flexible installations where gravity drainage is not available.
- Thermostatic control system maintains the selected wash and rinse temperatures throughout every cycle.
- Features like automatic tank loading, soft start, and integrated soap and rinse pumps reduce manual tasks.

1 YEAR WARRANTY
PARTS AND LABOR

MADE IN ITALY

SPECIFICATIONS

Power: 3550 W – 208 V – 1 PH – 60 Hz – 17 A

Clearance: 12.6 in (32 cm)

Rack dimensions: 19.6 x 19.6 in (50 x 50 cm)

Work height: 15.3 in (38 cm)

Tank capacity: 4 gal (15 L)

Wash cycle duration: 2 – 3 – 4 min.

Wash cycle capacity: 30/20/15 baskets/h

Water consumption: 0.6 gal (2 L)

Electric pump: 550 W

Wash tank element: 2000 W

Rinse tank element: 3000 W

Boiler capacity: 1.32 gal (5 L)

Water inlet temperature: 131 ÷ 140 °F (55 ÷ 60 °C)

Water inlet connection: 3/4 in G

Water outlet connection 32 mm/¾ in

Inlet water pressure: 40 ÷ 80 psi

Water hardness: 7.2 ÷ 12.5 °F (-13 ÷ -10 °C)

Rinse temperature: 180 ÷ 195 °F (82 ÷ 90 °C)

Noise level: < 70 dB (A)

Dimensions:
Length: 25.6 in (65 cm)
Width: 23.7 in (60 cm)
Height: 32.2 in (81 cm)

Connection: HARDWIRED 1-PHASE (208/240 V)

Net weight: 136 lb (62 kg)

c UL us LISTED


CLASSIFIED UL EPH

eurodib
1-888-956-6866
customerservice@eurodib.com
eurodib.com


2026.10

lamber®
DSP4EKDPS


FRONT VIEW

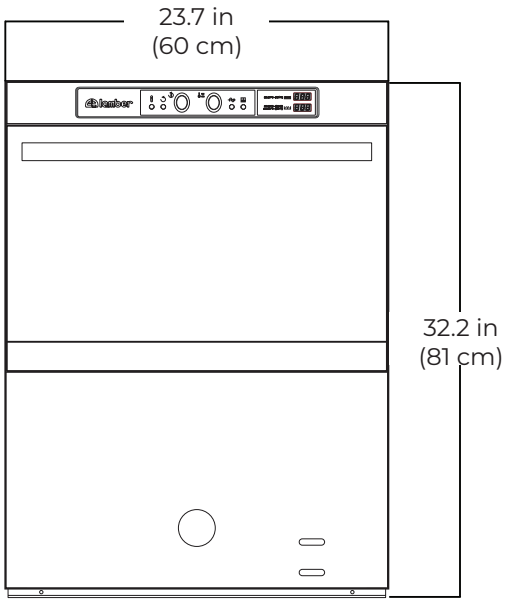

TOP VIEW

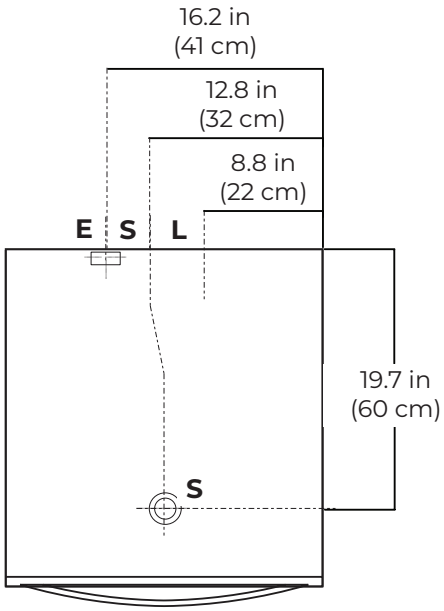

SIDE VIEW

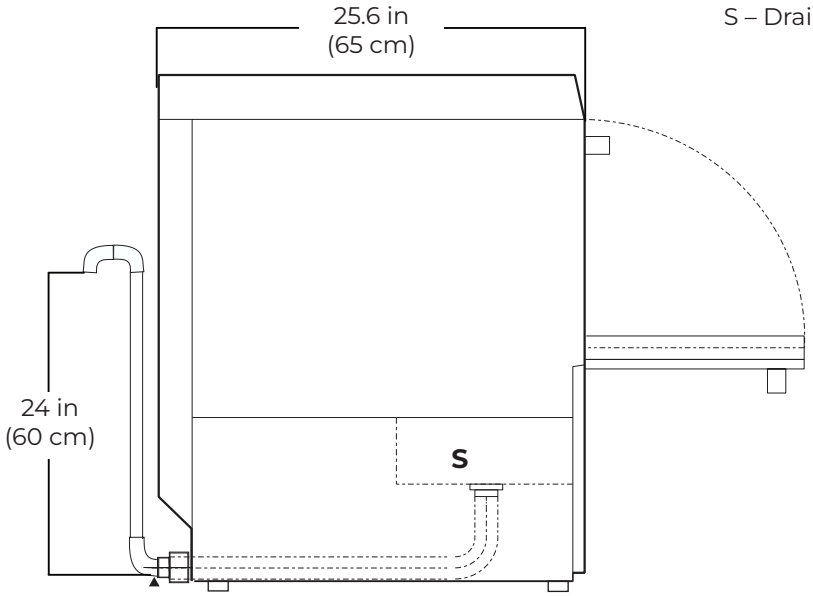

E – Hot water inlet
L – Electrical connection
S – Drain