

lamber[®] **DSP4EKDPS**



This professional under counter dishwasher is capable of delivering up to 600 dishes per hour with 4 operation cycles that ensure clean and sanitized dishes. The compact stainless steel design makes it ideal for commercial kitchens that require reliable and long-lasting performance during service hours.

FEATURES

- Exclusive DPS model equipped with top rotating rinse arm provides thorough water coverage for improved cleaning performance.
- Built-in drain pump enables flexible installations where gravity drainage is not available.
- Thermostatic control system maintains the selected wash and rinse temperatures throughout every cycle.
- Features like automatic tank loading, soft start, and integrated soap and rinse pumps reduce manual tasks.



PARTS AND
LABOR



SPECIFICATIONS

Power: 3550 W – 208 V – 1 PH –
60 Hz – 17 A

Clearance: 12.6" (32 cm)

Rack dimensions:
19.6" x 19.6" (50 cm x 50 cm)

Work height: 15.3" (38 cm)

Tank capacity: 4 gal (15 L)

Wash cycle duration: 2 - 3 - 4 - 15 min.

Wash cycle capacity:
30/20/15/4 baskets/h

Water consumption per cycle:
0.6 gal (2 L)

Electric pump: 550 W

Wash tank element: 2000 W

Rinse tank element: 3000 W

Boiler capacity: 1.32 gal (5 L)

Water inlet temperature:
131 ÷ 140 °F (55 ÷ 60 °C)

Water inlet connection: 3/4" G

Water outlet connection 32 mm / 3/4"

Inlet water pressure: 40 ÷ 80 psi

Water hardness: 7.2 ÷ 12.5 °F (-13 ÷ -10 °C)

Rinse temperature:
180 ÷ 195 °F (82 ÷ 90 °C)

Noise level: < 70 dB (A)

Dimensions:
Length: 25.6" (65 cm)
Width: 23.7" (60 cm)
Height: 32.2" (81 cm)

Connection:




(208/240 V)


Net weight: 136 lb (62 kg)



LEFT VIEW

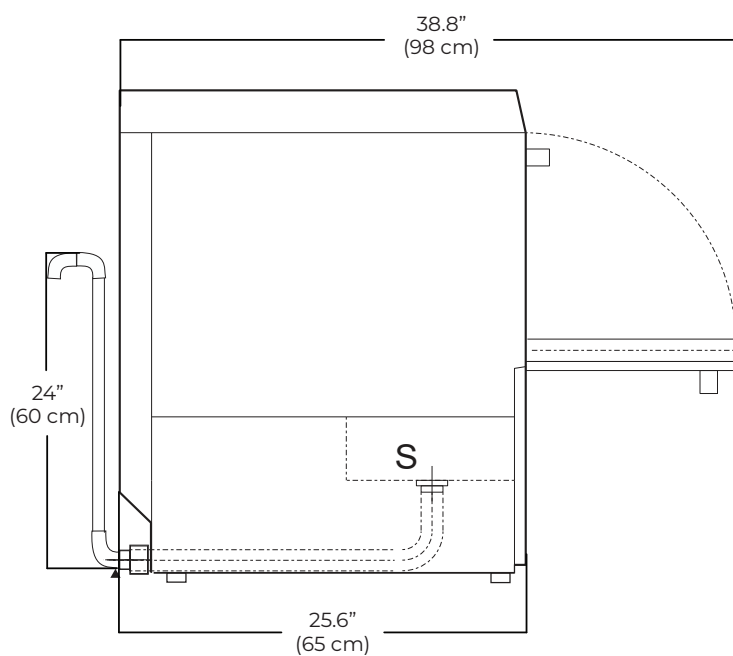

FRONTAL VIEW

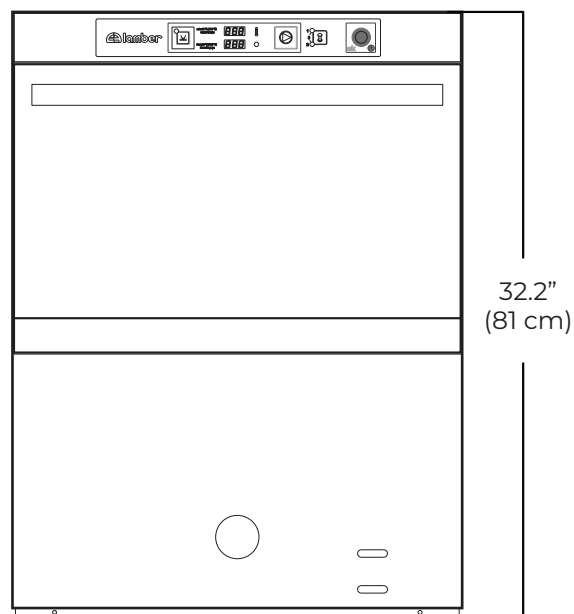

TOP VIEW

