

lamber[®] **L21EKDPSCV**



The Lamber L21EKDPSCV is a high-temperature pass-through dishwasher engineered in Italy for demanding commercial kitchens. Its double-wall insulated construction helps reduce heat loss and noise, while the Thermocontrol system ensures consistent sanitizing rinse temperatures throughout every cycle.

FEATURES

- Steam Condenser Technology recovers heat generated during each cycle and reuses it in subsequent cycles, helping reduce energy consumption and improve overall efficiency.
- Integrated drain pump for flexible installation and efficient water drainage.
- Upper and lower rotating wash and rinse arms ensure complete water coverage throughout the wash chamber delivering thorough cleaning.
- This unit must be connected to a water filtration system. Reverse osmosis (RO) filtration systems are not compatible with this machine.
- It's recommended to supply a mixed water supply (cold + hot) and using an adjustable thermostatic mixing valve in order for the unit to receive water that is in acceptable temperature range.



PARTS AND
LABOUR



SPECIFICATIONS

Drain pump: 30 W
Electric pump: 650 W
Wash tank elements: 3000 W
Rinse tank elements: 6000 W
Total rating: 6100 - 6700 W
Max. current intensity: 24 - 28 A
Wash cycles: 2 - 3 - 4 - 15 min.
Tank capacity: 8.9 gal (34 L)
Boiler capacity: 1.3 gal (4.9 L)
Cycle water consumption: 0.6 gal (2 L)
Basket size: 19.6" x 19.6" (50 x 50 cm)
Plates clearance: 16.3" (41 cm)
Inlet water connection: 64 ÷ 140 °F (18 ÷ 20 °C)
Inlet water pressure: 40 ± 80 psi
Water hardness: 7.2 ÷ 12.5 °F
Rinsing water temperature: 185 ÷ 195 °F (85 ÷ 90 °C)
Water inlet: ¾" G
Water outlet: ¾" (19 mm)
Noise level: <63 dB (A)
Fan: 40 W
Dimensions: Length: 28.5" (72 cm) Width: 26.7" (67 cm) Height: 66.5" (168 cm)

Connection: 
(208/240 V)


Net weight: 262 lb (119 kg)

Shipping dimensions:
Length: 34" (86 cm)
Width: 29" (73 cm)
Height: 71" (180 cm)


Gross weight: 295 lb (134 kg)



SIDE VIEW

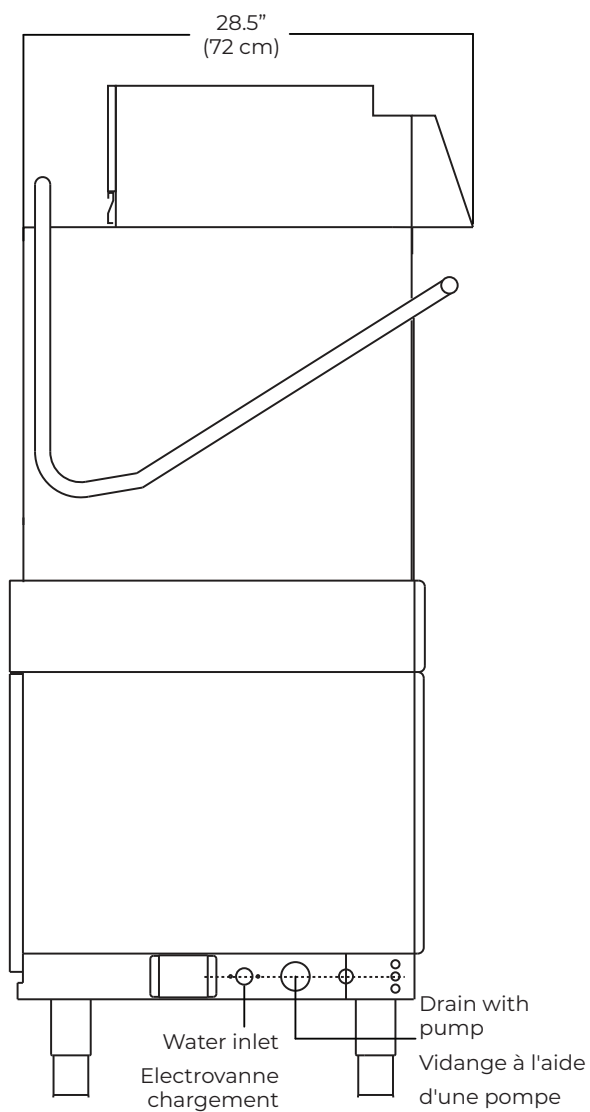

TOP VIEW

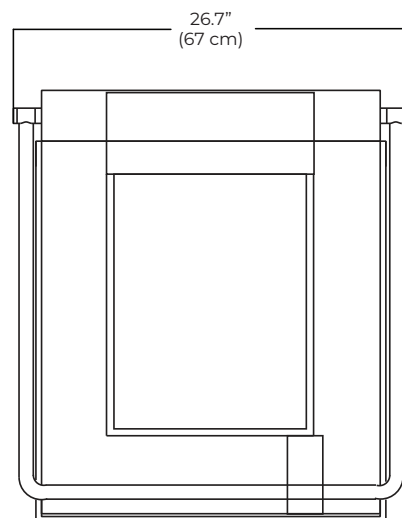

FRONT VIEW

