BREMA

G510AHC



The G510AHC Modular Granular Ice Machine is designed for restaurants, supermarkets, healthcare facilities, fish markets, and other commercial operations requiring a dependable supply of granular ice. Producing up to 430 kg (948 lbs.) of granular ice per day, this commercial ice machine delivers reliable, high-volume performance for food preservation, product display, and cooling applications.

FEATURES

- Produces granular ice with 80-82% dryness, ideal for food displays, product preservation, and healthcare applications.
- AISI 304 stainless steel construction provides exceptional durability and long-lasting performance in demanding commercial environments.
- Removable and washable air filter simplifies maintenance and helps maintain optimal operating efficiency.
- Automatic water fill system and shaft rotation sensor support reliable operation and consistent ice production.
- Easy-to-clean design simplifies maintenance and supports daily commercial operations.

3 YEARS WARRANTY — PARTS AND LABOUR

5 YEARS WARRANTY — FOR COMPRESSOR

MADE IN ITALY

TYPE OF ICE

FLAKE

SPECIFICATIONS

Type of ice: Flake ice (80-82 dry)

Production in 24h: 948 lb (430 kg)

Cooling system: Air

Refrigerant: R290

Voltage: 230 V / 60 Hz

Power consupmtion: 1600 W

Amperage: 20 A

Electrical consumption:
4.03 kWh/100 lb

Water consumption:
12 gal per 100 lb (1L/kg)

Dimensions:
Length: 22 6/16 in (569 mm)
Width: 22 in (560 mm)
Height: 27 6/16 in (695 mm)

Net weight: 225 lb (102 kg)

Shipping dimensions:
Length: 25 6/16 in (645 mm)
Width: 25 6/16 in (645 mm)
Height: 35 13/16 in (910 mm)

Gross weight: 249 lb (113 kg)

Compatible with

- BIN110
- BIN200
- BIN350

NSF — c UL us LISTED

eurodib

1-888-956-6866
customerservice@eurodib.com


eurodib.com

2026.03

BREMA

G510AHC

ISOMETRIC VIEW

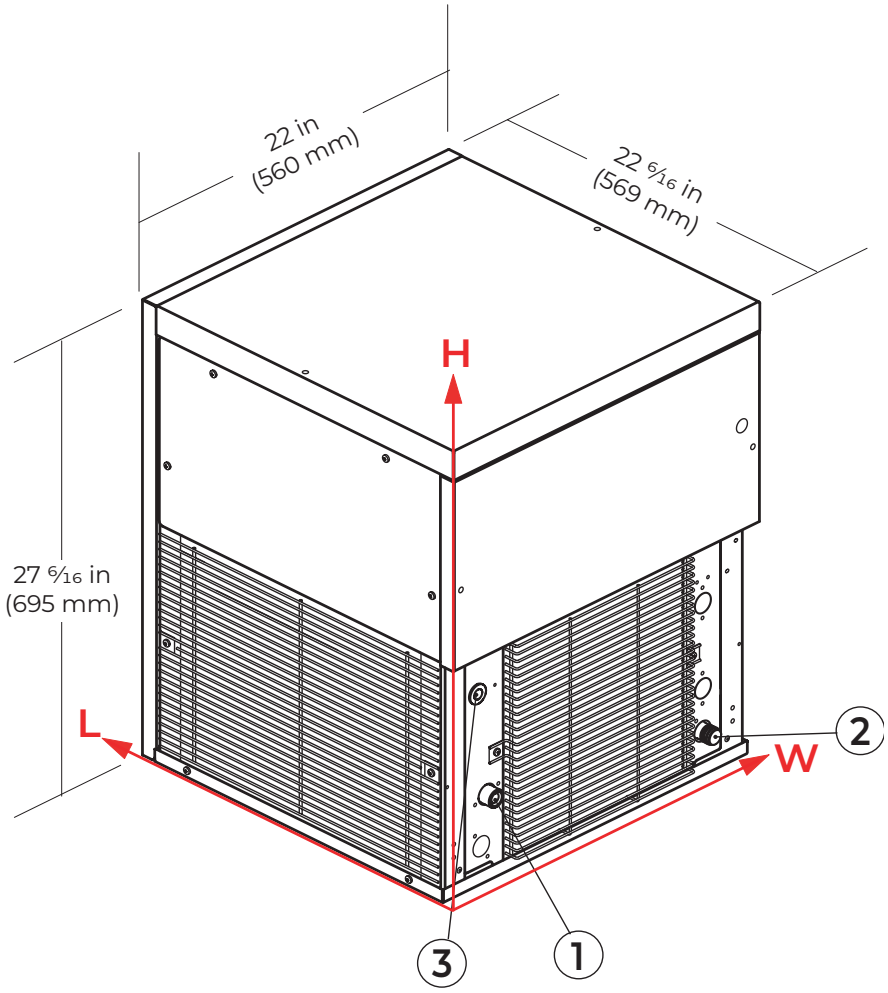

1. Water inlet: 3 3⁄16 in (80.5 mm) – 4 12⁄16 in (120 mm) – ¾ in
2. Water outlet: 18 14⁄16 in (479.5 mm) – 18 14⁄16 in (65 mm) – 15⁄16 in (24 mm)
3. Electrical connection: 2 11⁄16 in (67.5 mm) – 11 7⁄16 in (290 mm)

All measures are referred to the down-left corner.