lamber®
F99EKDPS



The latest model features a soft-start system that helps reduce detergent and water consumption for cleaner and more efficient wash cycles. Its increased clearance accommodates larger dishes while maintaining a compact under counter design to save space in any kitchen.

FEATURES

- Double-rack design boosts productivity, allowing to wash plates and glasses in the same cycle.
- Built-in drain pump enables flexible installations where direct gravity drainage is not available.
- Soft start, soap and rinse pumps and automatic tank loading features work together to keep each cycle running smoothly.
- Self-washing slanted tank and removable control panel make routine maintenance quick and effortless.

2 YEARS WARRANTY

PARTS AND LABOUR

SPECIFICATIONS

Power: 6500 W – 208 V – 1 PH – 60 Hz – 29 A

Clearance: 14.5 in (36 cm)

Basket size: 19.6 x 19.6 in (50 x 50 cm)

Tank capacity: 4.7 gal (17 L)

Wash cycles: 2 – 3 – 4 min

Wash capacity: 30/20/15 baskets/h

Water consumption: 0.6 gal (2.2 L)

Electric pump: 650 W

Wash tank element: 2000 W

Rinse tank element: 6000 W

Boiler capacity: 1.5 gal (5 L)

Water inlet temperature: 131 ÷ 140 °F (55 ÷ 60 °C)

Water inlet connection: 3/4 in

Water outlet connection: 32 mm/¾ in

Inlet water pressure: 40 ÷ 80 psi

Water hardness: 7.2 ÷ 12.55 °F (44 ÷ 54 °C)

Rinse temperature: 180 ÷ 195 °F (82 ÷ 90 °C)

Noise level: < 54 dB (A)

Dimensions:
Length: 25.5 in (65 cm)
Width: 23.6 in (60 cm)
Height: 32.2 in (82 cm)

Connection: HARDWIRED 1-PHASE (208/240 V)

Net weight: 158 lb (72 kg)

Included accessories

- CC00024 – 2 baskets for dishes
- CC00019 – 1 flat basket
- CC00045 – 2 cutlery containers

c UL us LISTED

CLASSIFIED UL EPH

ENERGY STAR

eurodib


1-888-956-6866
customerservice@eurodib.com

eurodib.com


2026.10

lamber®
F99EKDPS

FRONT VIEW

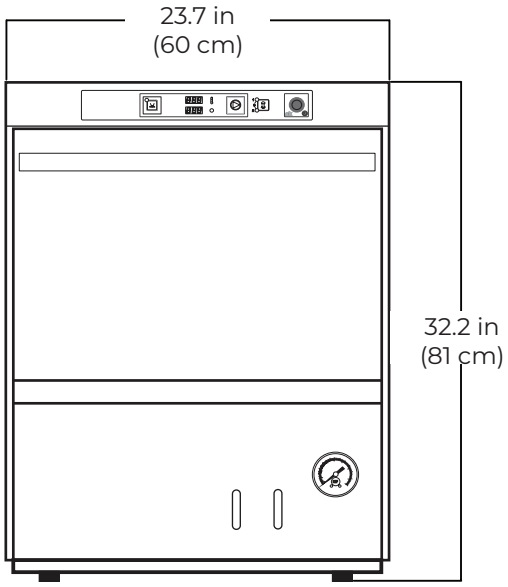

TOP VIEW

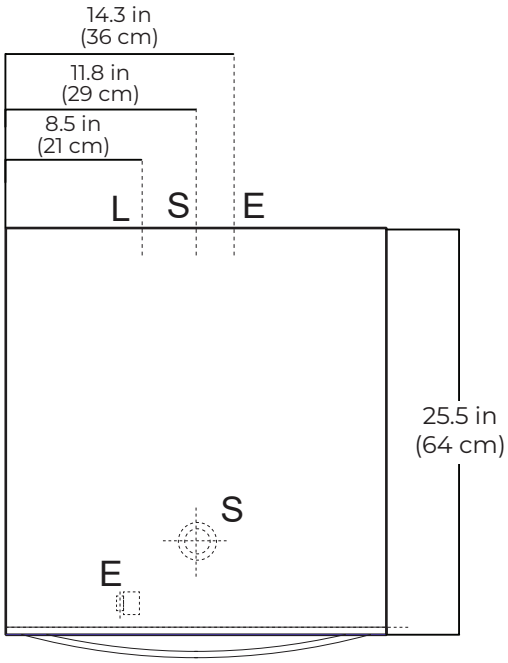

E – Water inlet
L – Electrical input
S – Drain

SIDE VIEW

